


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION. IT MAY NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR MANUFACTURING OR ANY OTHER PURPOSE WITHOUT PRIOR WRITTEN PERMISSION.

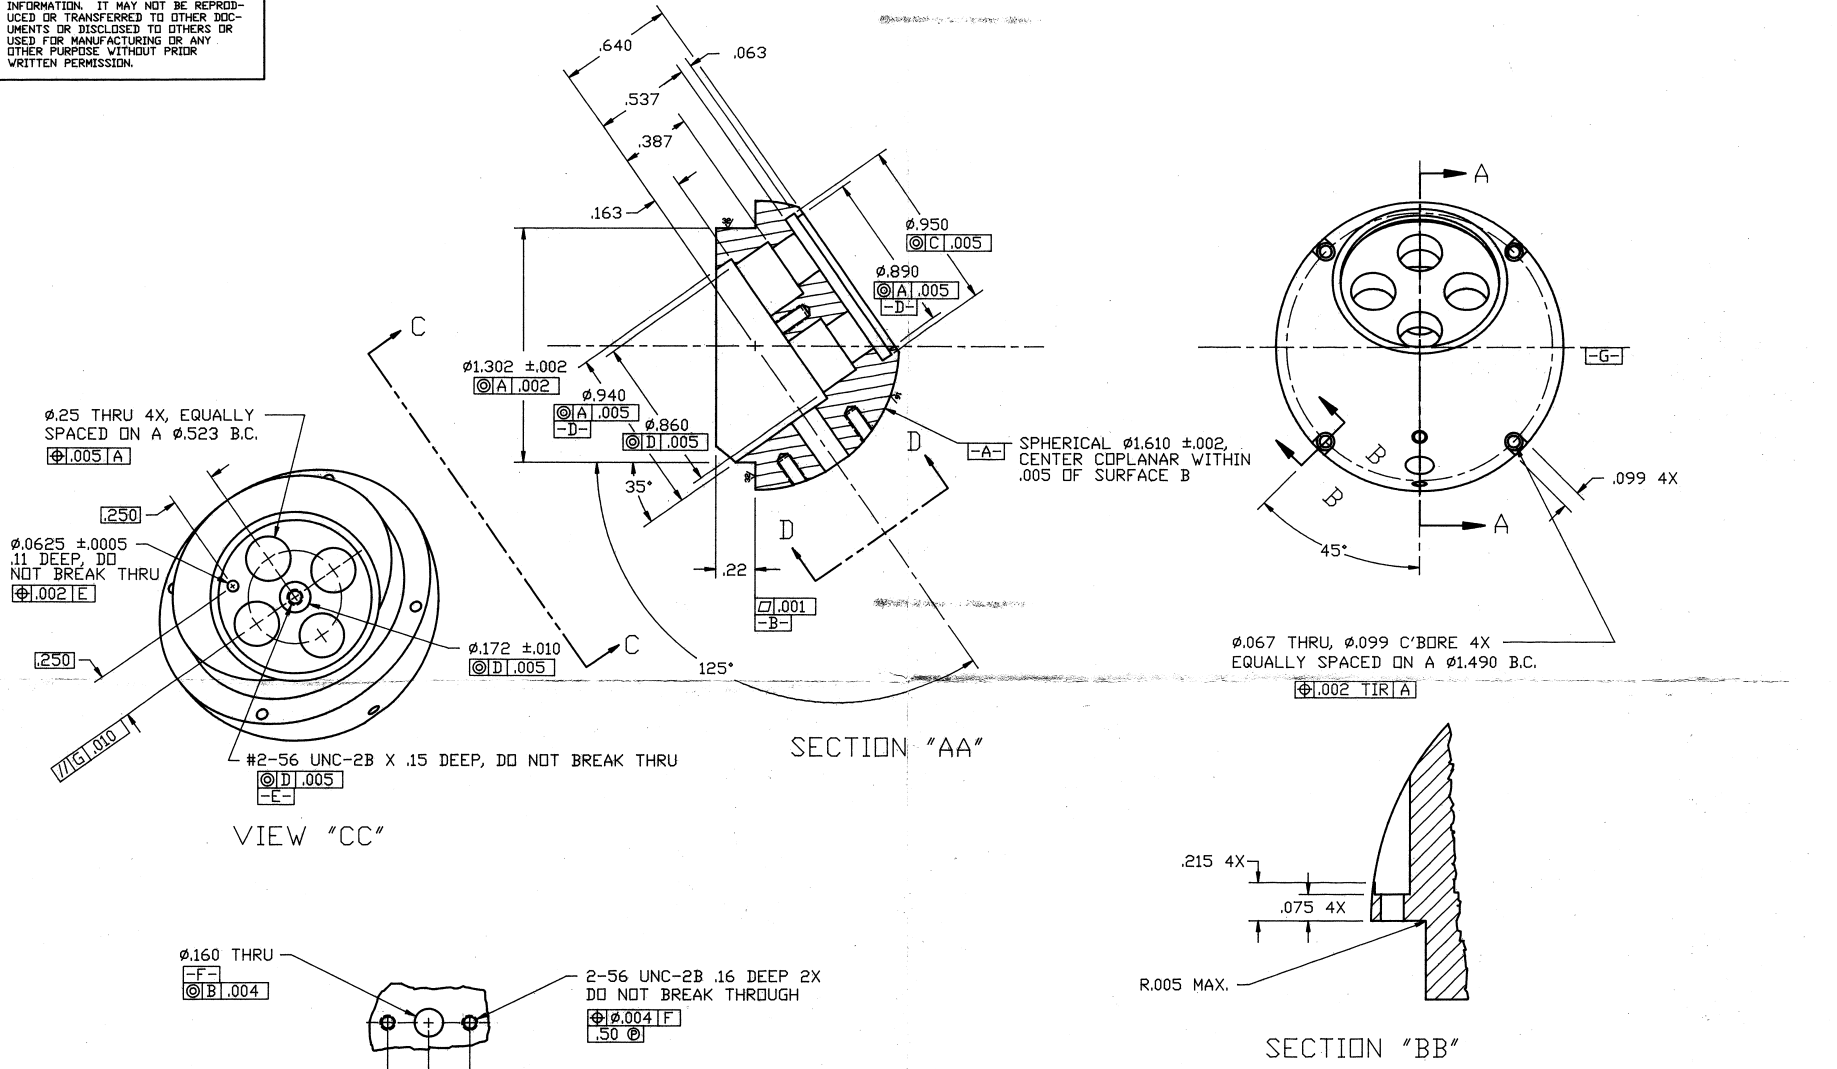

Ø.25 THRU 4X, EQUALLY SPACED ON A Ø.523 B.C.
 0.0051A

Ø.0625 ± 0.0005
 .11 DEEP, DO NOT BREAK THRU
 0.0021E

#2-56 UNC-2B X .15 DEEP, DO NOT BREAK THRU
 0.0011E

VIEW "CC"

Ø.160 THRU
 0.0041F

2-56 UNC-2B .16 DEEP 2X
 DO NOT BREAK THROUGH
 0.0041F
 .50 0

VIEW "DD"

2) TUMBLE BURNISH O.D. TO A HIGH POLISH
 NOTES: 1) TUMBLE DEBURR

| | | | | | | |
|--|----------|------------------------|----------------------|-----------|------------------------------------|--------------------------------|
| UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ANSI Y 14. DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING. BREAK SHARP EDGES. | | DWN JOHN MAGOLSKE | DATE 3/18/91 | | VIS-5000 HEAD CAP, WITH BUTTONS | |
| .xx ± .010 | x* ± .5* | CHECK | QC | | SIZE C | DRAWING NUMBER 5010-0069-00 |
| .xxx ± .005 | ✓ | PRJ ENG | | SCALE 2:1 | ECD NUMBER | SHEET 1 OF 1 |
| MATERIAL AL 6061-T6 | | NEXT ASSY nnnn-nnnn | USED ON uuuu-uuuu | | | |
| FINISH ANODIZE TYPE II, CLASS 2, DYE BLACK .00025 THK. DO NOT ETCH. HIGH LUSTER FINISH REQUIRED ON O.D. | | nnnn-nnnn1 | uuuu-uuuu1 | | | |
| | | nnnn-nnnn2 | uuuu-uuuu2 | | | |
| | | nnnn-nnnn3 | uuuu-uuuu3 | | | |